

Demagnetization Factor Dependence of Energy of Ultrathin Ferromagnetic Films with Four Layers

P. Samarasekara*

Department of Physics, University of Peradeniya, Peradeniya, Sri Lanka

ABSTRACT

The variation of energy with demagnetization factor will be investigated for *sc*(001) and *bcc*(001) ferromagnetic lattices with four layers using classical model of Heisenberg Hamiltonian. According to 3-D plots, the films with four layers can be easily oriented in certain directions under the influence of particular demagnetization factor and angles for both *sc*(001) and *bcc*(001) ferromagnetic lattice structures. A flat part can be seen in the middle of 3-D plots in addition to periodic variations. When the demagnetization factor is given by $\frac{N_d}{\mu_0\omega} = 6$, *sc*(001) film with four layers can be easily oriented in 0.6 radians direction for the energy parameter values used in this simulation. Under the influence of demagnetization factor given by $\frac{N_d}{\mu_0\omega} = 5.2$, thin film of *bcc*(001) lattice with four layers can be easily oriented along 0.63 radians direction.

Keywords: Magnetic thin films, Heisenberg Hamiltonian, demagnetization factor

***Author for Correspondence:** E-mail: pubudus@phy.ruh.ac.lk

1. INTRODUCTION

For the first time, the effect of demagnetization factor on energy of ferromagnetic thin films with four layers will be described in this report. Earlier, the energy of ultrathin ferromagnetic films with two and three layers has been studied by us [1]. The film with two layers was equivalent to an oriented film, when anisotropy constants do not vary inside the film. But the energy of films with three layers indicates periodic variation [1]. Introducing second order perturbation induces some sudden overshooting of energy curves, compared with smooth energy curves obtained for oriented ferromagnetic ultrathin films [1]. The energy of oriented thick ferromagnetic films with

10,000 layers has been studied [2]. Also, the thick films have been studied using Heisenberg Hamiltonian with 2nd order perturbation [3].

Studies of exchange anisotropy have received a wide attention in the last decade, because of the difficulties of physical understanding of exchange anisotropy and to its application in magnetic media technology and magnetic sensors [4]. Magnetic properties of ferromagnetic thin films and multilayers have been extensively investigated because of their potential impact on magnetic recording devices. The magnetic properties of thin films of ferromagnetic materials have been investigated using the Bloch spin-wave theory earlier [5]. The magnetization of some thin

films shows an in-lane orientation due to the dipole interaction. Due to the broken symmetry uniaxial anisotropy energies at the surfaces of the film, the perpendicular magnetization is preferential. But due to the strain-induced distortion in the inner layers, bulk anisotropy energies will appear absent or very small in the ideal crystal. Some thin films indicate a tetragonal distortion resulting in stress-induced uniaxial anisotropy energy in the inner layers with perpendicular orientation of easy axis. The magnetic in-plane anisotropy of a square two-dimensional (2D) Heisenberg

ferromagnet in the presence of magnetic dipole interaction has been determined earlier [6]. The long range character of the dipole interaction itself is sufficient to stabilize the magnetization in 2-D magnet. Also, the easy and hard axes of magnetization with respect to lattice frame are determined by the anisotropies. Magnetic properties of the Ising ferromagnetic thin films with alternating superlattice layers were investigated [7]. In addition to these, Monte Carlo simulations of hysteresis loops of ferromagnetic thin films have been theoretically traced [8].

2. MODEL AND DISCUSSION

The classical model of Heisenberg Hamiltonian of any ferromagnetic film can be generally represented by the following equation [1, 2].

$$H = -\frac{J}{2} \sum_{m,n} \vec{S}_m \cdot \vec{S}_n + \frac{\omega}{2} \sum_{m \neq n} \left(\frac{\vec{S}_m \cdot \vec{S}_n}{r_{mn}^3} - \frac{3(\vec{S}_m \cdot \vec{r}_{mn})(\vec{r}_{mn} \cdot \vec{S}_n)}{r_{mn}^5} \right) - \sum_m D_{\lambda_m}^{(2)} (S_m^z)^2 - \sum_m D_{\lambda_m}^{(4)} (S_m^z)^4 - \sum_{m,n} [\bar{H} - (N_d \bar{S}_n / \mu_0)] \cdot \vec{S}_m - \sum_m K_s \sin 2\theta_m$$

The total energy is given by the following equation [1].

$$E(\theta) = E_0 + \vec{\alpha} \cdot \vec{\varepsilon} + \frac{1}{2} \vec{\varepsilon} \cdot C \cdot \vec{\varepsilon} = E_0 - \frac{1}{2} \vec{\alpha} \cdot C^+ \cdot \vec{\alpha} \quad (1)$$

Matrix elements of the above matrix C are given by

$$C_{mn} = -(JZ_{|m-n|} - \frac{\omega}{4} \Phi_{|m-n|}) - \frac{3\omega}{4} \cos 2\theta \Phi_{|m-n|} + \frac{2N_d}{\mu_0} + \delta_{mm} \left\{ \sum_{\lambda=1}^N [JZ_{|m-\lambda|} - \Phi_{|m-\lambda|} \left(\frac{\omega}{4} + \frac{3\omega}{4} \cos 2\theta \right)] - 2(\sin^2 \theta - \cos^2 \theta) D_m^{(2)} + 4 \cos^2 \theta (\cos^2 \theta - 3 \sin^2 \theta) D_m^{(4)} + H_{in} \sin \theta + H_{out} \cos \theta - \frac{4N_d}{\mu_0} + 4K_s \sin 2\theta \right\} \quad (2)$$

$\vec{\alpha}(\varepsilon) = \vec{B}(\theta) \sin 2\theta$ are the terms of matrices with

$$B_{\lambda}(\theta) = -\frac{3\omega}{4} \sum_{m=1}^N \Phi_{|\lambda-m|} + D_{\lambda}^{(2)} + 2D_{\lambda}^{(4)} \cos^2 \theta \quad (3)$$

Here [2]

$$E_0 = -\frac{J}{2}[NZ_0 + 2(N-1)Z_1] + \{N\Phi_0 + 2(N-1)\Phi_1\}(\frac{\omega}{8} + \frac{3\omega}{8}\cos 2\theta) - N(\cos^2 \theta D_m^{(2)} + \cos^4 \theta D_m^{(4)} + H_{in} \sin \theta + H_{out} \cos \theta - \frac{N_d}{\mu_0} + K_s \sin 2\theta)$$

E_0 is the energy of the oriented thin ferromagnetic film. Here $J, Z_{|m-n|}, \omega, \Phi_{|m-n|}, \theta, D_m^{(2)}, D_m^{(4)}, H_{in}, H_{out}, N_d, K_s, m, n$ and N are spin exchange interaction, number of nearest spin neighbors, strength of long range dipole interaction, constants for partial summation of dipole interaction, azimuthal angle of spin, second and fourth order

anisotropy constants, in-plane and out-of-plane applied magnetic fields, demagnetization factor, stress induced anisotropy constant, spin plane indices and total number of layers in the film, respectively. When the stress applies normal to the film plane, the angle between m th spin and the stress is θ_m . For most ferromagnetic films, $Z_{\delta \geq 2} = \Phi_{\delta \geq 2} = 0$. If the anisotropy constants do not vary within the film, then $D_m^{(2)}$ or $D_m^{(4)}$ is constant for any layer.

From Eq. (2), the matrix elements of matrix C can be given as under.

$$C_{11} = C_{44} = JZ_1 - \frac{\omega}{4}\Phi_1(1 + 3\cos 2\theta) - 2(\sin^2 \theta - \cos^2 \theta)D_m^{(2)} + 4\cos^2 \theta(\cos^2 \theta - 3\sin^2 \theta)D_m^{(4)} + H_{in} \sin \theta + H_{out} \cos \theta - \frac{2N_d}{\mu_0} + 4K_s \sin 2\theta$$

When the difference between two indices (m, n) is 1 or -1,

$$C_{12} = C_{23} = C_{34} = C_{21} = C_{32} = C_{43} = -JZ_1 + \frac{\omega}{4}\Phi_1(1 - 3\cos 2\theta) + \frac{2N_d}{\mu_0}$$

$$C_{22} = C_{33} = 2JZ_1 - \frac{\omega}{2}\Phi_1(1 + 3\cos 2\theta) - 2(\sin^2 \theta - \cos^2 \theta)D_m^{(2)} + 4\cos^2 \theta(\cos^2 \theta - 3\sin^2 \theta)D_m^{(4)} + H_{in} \sin \theta + H_{out} \cos \theta - \frac{2N_d}{\mu_0} + 4K_s \sin 2\theta$$

$$\text{From Eq. (3), } B_1(\theta) = B_4(\theta) = -\frac{3\omega}{4}(\Phi_0 + \Phi_1) + D_m^{(2)} + 2D_m^{(4)} \cos^2 \theta$$

$$B_2(\theta) = B_3(\theta) = -\frac{3\omega}{4}(\Phi_0 + 2\Phi_1) + D_m^{(2)} + 2D_m^{(4)} \cos^2 \theta$$

Therefore, $C_{11} = C_{44}, C_{22} = C_{33}, C_{21} = C_{12} = C_{23} = C_{32} = C_{34} = C_{43}$

This simulation will be carried out for

$$\frac{J}{\omega} = \frac{D_m^{(2)}}{\omega} = \frac{H_{in}}{\omega} = \frac{H_{out}}{\omega} = \frac{K_s}{\omega} = 10 \text{ and } \frac{D_m^{(4)}}{\omega} = 5$$

For sc(001) lattice, $Z_0 = 4$, $Z_1 = 1$, $Z_2 = 0$, $\Phi_0 = 9.0336$, $\Phi_1 = -0.3275$ and $\Phi_2 = 0$ [9],

$$\frac{C_{11}}{\omega} = \frac{C_{44}}{\omega} = 10.08 + 20.2456 \cos 2\theta$$

$$+ 20 \cos^2 \theta (\cos^2 \theta - 3 \sin^2 \theta) - \frac{2N_d}{\mu_0 \omega} + 10 \cos \theta + 10 \sin \theta + 40 \sin 2\theta$$

$$\frac{C_{22}}{\omega} = \frac{C_{33}}{\omega} = 20.164 + 20.49 \cos 2\theta$$

$$+ 20 \cos^2 \theta (\cos^2 \theta - 3 \sin^2 \theta) - \frac{2N_d}{\mu_0 \omega} + 10 \cos \theta + 10 \sin \theta + 40 \sin 2\theta$$

$$\frac{C_{12}}{\omega} = \frac{C_{21}}{\omega} = \frac{C_{23}}{\omega} = \frac{C_{32}}{\omega} = \frac{C_{34}}{\omega} = \frac{C_{43}}{\omega} = -10.08 + 0.2456 \cos 2\theta + \frac{2N_d}{\mu_0 \omega}$$

$$\frac{\alpha_1}{\omega} = \frac{\alpha_4}{\omega} = (3.47 + 10 \cos^2 \theta) \sin 2\theta$$

$$\frac{\alpha_2}{\omega} = \frac{\alpha_3}{\omega} = (3.716 + 10 \cos^2 \theta) \sin 2\theta$$

$$\frac{E_0}{\omega} = -105.73 + 12.81 \cos 2\theta$$

$$- 4(10 \cos^2 \theta + 5 \cos^4 \theta + 10 \cos \theta + 10 \sin \theta - \frac{N_d}{\mu_0 \omega} + 10 \sin 2\theta)$$

$$\frac{C_{13}}{\omega} = \frac{C_{14}}{\omega} = \frac{C_{24}}{\omega} = \frac{C_{31}}{\omega} = \frac{C_{41}}{\omega} = \frac{C_{42}}{\omega} = \frac{2N_d}{\mu_0 \omega}$$

Under some special conditions [1], C^+ is the standard inverse of matrix C , given by matrix

element $C^+_{mn} = \frac{\text{cofactor} C_{nm}}{\det C}$. For the convenience, the matrix elements C^+_{mn} will be given in terms

of C_{11} , C_{22} , C_{12} and C_{13} only.

$$\begin{aligned} \text{Determinant of } C = & C_{11}[C_{22}(C_{22}C_{11}-C_{12}^2)-C_{12}(C_{12}C_{11}-C_{12}C_{13})-C_{13}(C_{12}^2-C_{22}C_{13})] \\ & - C_{12}[C_{12}(C_{22}C_{11}-C_{12}^2)-C_{12}(C_{13}C_{11}-C_{12}C_{13}) + C_{13}(C_{13}C_{12}-C_{22}C_{13})] \\ & + C_{13}[C_{12}(C_{12}C_{11}-C_{12}C_{13})-C_{22}(C_{13}C_{11}-C_{12}C_{13}) + C_{13}(C_{13}^2-C_{12}C_{13})] \\ & - C_{13}[C_{12}(C_{12}^2-C_{22}C_{13})-C_{22}(C_{13}C_{12}-C_{13}C_{22}) + C_{12}(C_{13}^2-C_{12}C_{13})] \end{aligned}$$

$$C_{11}^+ = C_{44}^+ = \frac{C_{22}(C_{22}C_{11}-C_{12}^2)-C_{12}(C_{12}C_{11}-C_{12}C_{13})+C_{13}(C_{12}^2-C_{22}C_{13})}{\det C}$$

$$C_{12}^+ = C_{21}^+ = -\frac{C_{12}(C_{22}C_{11} - C_{12}^2) - C_{13}(C_{12}C_{11} - C_{12}C_{13}) + C_{13}(C_{12}^2 - C_{22}C_{13})}{\det C}$$

$$C_{23}^+ = C_{32}^+ = -\frac{C_{11}(C_{12}C_{11} - C_{12}C_{13}) - C_{13}(C_{12}C_{11} - C_{13}^2) + C_{13}(C_{12}^2 - C_{12}C_{13})}{\det C}$$

$$C_{13}^+ = C_{31}^+ = \frac{C_{12}(C_{12}C_{11} - C_{13}C_{12}) - C_{13}(C_{22}C_{11} - C_{13}^2) + C_{13}(C_{12}C_{22} - C_{12}C_{13})}{\det C}$$

$$C_{22}^+ = C_{33}^+ = \frac{C_{11}(C_{22}C_{11} - C_{12}^2) - C_{13}(C_{13}C_{11} - C_{12}C_{13}) + C_{13}(C_{12}C_{13} - C_{22}C_{13})}{\det C}$$

$$C_{14}^+ = C_{41}^+ = -\frac{C_{12}(C_{12}^2 - C_{13}C_{22}) - C_{13}(C_{22}C_{12} - C_{12}C_{13}) + C_{13}(C_{22}^2 - C_{12}^2)}{\det C}$$

$$C_{24}^+ = C_{42}^+ = \frac{C_{11}(C_{12}^2 - C_{13}C_{22}) - C_{13}(C_{12}^2 - C_{13}^2) + C_{13}(C_{12}C_{22} - C_{12}C_{13})}{\det C}$$

$$C_{34}^+ = C_{43}^+ = -\frac{C_{11}(C_{12}C_{22} - C_{12}C_{13}) - C_{12}(C_{12}^2 - C_{13}C_{12}) + C_{13}(C_{12}C_{13} - C_{22}C_{13})}{\det C}$$

From Eq. (1),

$$E(\theta) = E_0 - \alpha_1^2(C_{11}^+ + C_{14}^+) - \alpha_1\alpha_2(C_{12}^+ + C_{13}^+ + C_{24}^+ + C_{34}^+) - \alpha_2^2(C_{22}^+ + C_{23}^+) \quad (4)$$

Matrix elements of inverse matrix C_{mn}^+ can be found from above equations, and hence total energy can be found from Eq. (4). Then 3-D plot of energy versus angle and $\frac{N_d}{\mu_0\omega}$ can be given as shown in Figure 1. A flat portion can

be seen in the middle of the graph. Several energy minimums can be observed at different values of $\frac{N_d}{\mu_0\omega}$ and angle, indicating that the sc(001) ferromagnetic films with four layers can be easily oriented in these directions. For example, the film can be easily oriented at $\frac{N_d}{\mu_0\omega} = 6$ in certain directions.

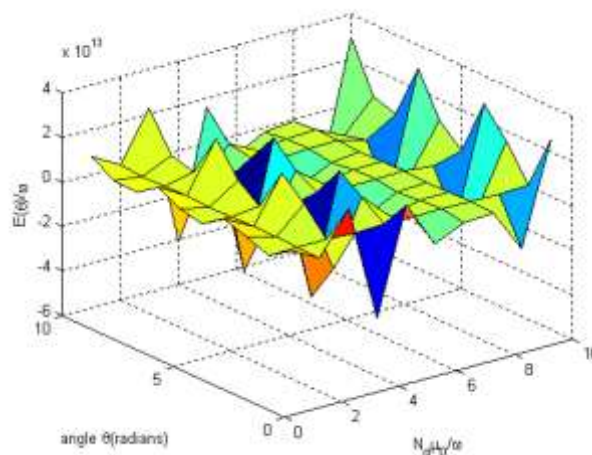


Fig. 1: 3-D Plot of Energy versus Angle and $\frac{N_d}{\mu_0\omega}$ for sc(001) Lattice.

The easy directions corresponding to $\frac{N_d}{\mu_0 \omega}$ can be found from Figure 2. According to this graph, this film can be easily oriented in direction given by 0.6 radians.

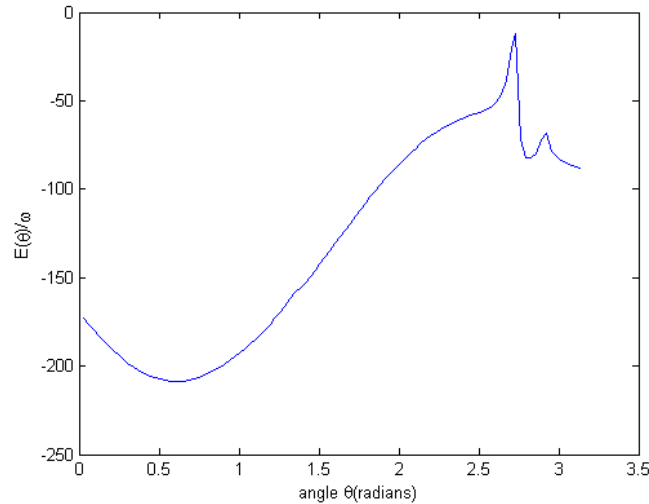


Fig. 2: Plot of Energy versus Angle at $\frac{N_d}{\mu_0 \omega} = 6$ for $sc(001)$ Lattice.

For $bcc(001)$ lattice, $Z_0 = 0$, $Z_1 = 4$, $Z_2 = 0$, $\Phi_0 = 5.8675$ and $\Phi_1 = 2.7126$ [9],

$$\frac{C_{12}}{\omega} = \frac{C_{21}}{\omega} = \frac{C_{23}}{\omega} = \frac{C_{32}}{\omega} = \frac{C_{34}}{\omega} = \frac{C_{43}}{\omega} = -39.32 - 2.03 \cos 2\theta + \frac{2N_d}{\mu_0 \omega}$$

$$\frac{C_{13}}{\omega} = \frac{C_{31}}{\omega} = \frac{C_{14}}{\omega} = \frac{C_{24}}{\omega} = \frac{C_{41}}{\omega} = \frac{C_{42}}{\omega} = \frac{2N_d}{\mu_0 \omega}$$

$$\frac{C_{11}}{\omega} = \frac{C_{44}}{\omega} = 39.32 - 2.03 \cos 2\theta - \frac{2N_d}{\mu_0 \omega} + 20 \cos^2 \theta (\cos^2 \theta - 3 \sin^2 \theta) + 10 \sin \theta + 10 \cos \theta + 40 \sin 2\theta$$

$$\frac{C_{22}}{\omega} = \frac{C_{33}}{\omega} = 78.64 - 4.07 \cos 2\theta - \frac{2N_d}{\mu_0 \omega} + 20 \cos^2 \theta (\cos^2 \theta - 3 \sin^2 \theta) + 10 \sin \theta + 10 \cos \theta + 40 \sin 2\theta$$

$$\frac{\alpha_1}{\omega} = \frac{\alpha_4}{\omega} = (3.565 + 10 \cos^2 \theta) \sin 2\theta$$

$$\frac{\alpha_2}{\omega} = \frac{\alpha_3}{\omega} = (1.53 + 10 \cos^2 \theta) \sin 2\theta$$

$$\frac{E_0}{\omega} = -115 + 14.9 \cos 2\theta - 4(10 \cos^2 \theta + 5 \cos^4 \theta + 10 \sin \theta + 10 \cos \theta - \frac{N_d}{\mu_0 \omega} + 10 \sin 2\theta)$$

3-D plot of energy versus angle and $\frac{N_d}{\mu_0\omega}$ for bcc(001) lattice is given in Figure 3. Although a flat portion can be observed at the middle of this graph, the shape of this graph is slightly different from graph 1. Energy is minimum at certain values of angles and $\frac{N_d}{\mu_0\omega}$ indicating

that film can be easily oriented along those directions under the influence of certain demagnetization factors. At $\frac{N_d}{\mu_0\omega} = 5.2$, the film can be easily oriented in certain directions.

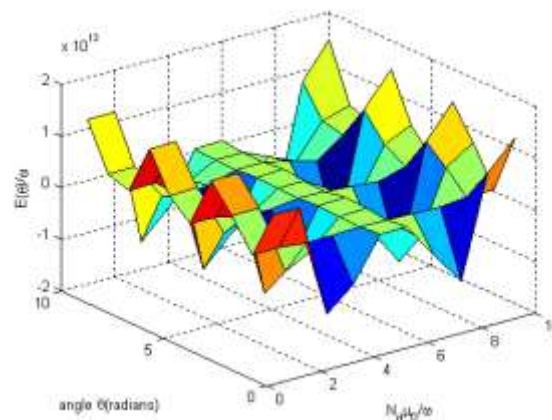


Fig. 3: 3-D plot of Energy versus Angle and $\frac{N_d}{\mu_0\omega}$ for bcc(001) Lattice.

The graph between energy and angle was drawn in order to determine these easy directions at $\frac{N_d}{\mu_0\omega} = 5.2$ as shown in Figure 4.

This film can be easily oriented in 0.63 radians direction.

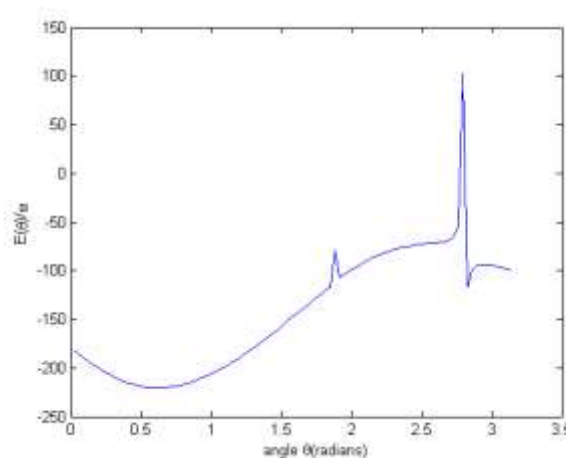


Fig. 4: Plot of Energy versus Angle at $\frac{N_d}{\mu_0\omega} = 5.2$ for bcc(001) Lattice.

3. CONCLUSIONS

For both sc(001) and bcc(001) ferromagnetic lattice structures, energy is minimum at certain values of demagnetization factor and angles. Thin film of sc(001) lattice with four layers can be easily oriented along 0.6 radians direction under the influence of demagnetization factor given by $\frac{N_d}{\mu_0\omega} = 6$.

When the demagnetization factor is given by $\frac{N_d}{\mu_0\omega} = 5.2$, bcc(001) film with four layers can be easily oriented in 0.63 radians direction. Although this simulation was carried out for

$$\frac{J}{\omega} = \frac{D_m^{(2)}}{\omega} = \frac{H_{in}}{\omega} = \frac{H_{out}}{\omega} = \frac{K_s}{\omega} = 10 \text{ and } \frac{D_m^{(4)}}{\omega} = 5$$

, this same simulation can be carried out for any value of

$$\frac{J}{\omega}, \frac{D_m^{(2)}}{\omega}, \frac{H_{in}}{\omega}, \frac{H_{out}}{\omega}, \frac{K_s}{\omega} \text{ and } \frac{D_m^{(4)}}{\omega}.$$

REFERENCES

1. Samarasekara P. *Electronic Journal of Theoretical Physics*. 2006. 3(11). 71–83p.
2. Samarasekara P. *Chinese Journal of Physics*. 2006. 44(5). 377–386p.
3. Samarasekara P. and Silva S. N. P. De. *Chinese Journal of Physics*. 2007. 45(2-I). 142–150p.
4. Lederman David et al. *Physical Review*. 2004. B(70). 18442–18446p.
5. Klein Martin J. and Robert S. Smith. *Physical Review*. 1951. 81. 378–382p.
6. Dantziger M. et al. *Physical Review*. 2002. B(66). 094416–094420p.
7. Bentaleb M. et al. *Chinese Journal of Physics*. 2002. 40(3). 307–311p.
8. Zhao D. et al. *Journal of Applied Physics*. 2002. 91(5). 3150–3153p.
9. Usadel K. D. and Hucht A. *Physical Review*. 2002. B 66. 024419–1p.